

VPP6N0-S AGX 5G

YUAN
Visualize Intelligent Planet

Highly Integrated AI Server, Provide 275 TOPS and Expandability

Features

- Powered by NVIDIA® Jetson AGX Orin™ up to 275 TOPS
- 5G & 4K60 with Low Streaming Latency
- 2×PCIe Gen3×4
- 3×M.2 M Key / 1×M.2 E Key
- 2×USB3.2 Gen2
- CAN Bus / UART / I2C / SPI



Specification

System		
CPU	NVIDIA Jetson AGX Orin™ 32GB 8-core Arm® Cortex®-A78AE v8.2 64-Bit CPU 2MB L2 + 4MB L3	NVIDIA Jetson AGX Orin™ 64GB 12-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU 3MB L2 + 6MB L3
GPU	NVIDIA Jetson AGX Orin™ 32GB 1792-Core NVIDIA Ampere Architecture GPU with 56 Tensor Cores	NVIDIA Jetson AGX Orin™ 64GB 2048-Core NVIDIA Ampere Architecture GPU with 64 Tensor Cores
AI Performance	NVIDIA Jetson AGX Orin™ 32GB 200 TOPS	NVIDIA Jetson AGX Orin™ 64GB 275 TOPS
System Memory	NVIDIA Jetson AGX Orin™ 32GB 32GB LPDDR5	NVIDIA Jetson AGX Orin™ 64GB 64GB LPDDR5
Interface		
Storage	64GB eMMC 5.1 (On NVIDIA Jetson AGX Orin™ Module)	
Display Interface	2×HDMI2.0 1×DP *Select 2 Video Output Port at Same Time	
Ethernet	2×RJ45 for 10/100/1000Mbps Ethernet DHCP Client	
Expansion Slot	PCIe 1×PCIe Gen3×4 Slot(*) 1×PCIe Gen3×4 Slot(**) M.2 1×M.2 2230 E Key PCIe Gen4*1/USB2.0/SDIO Slot 1×M.2 2280 M Key PCIe Gen4×4 Slot 1×M.2 2280 M Key PCIe Gen4×4 Slot(*) 1×M.2 3080 M Key PCIe Gen4×4 Slot(**) * Please select either 1×PCIe Gen3×4 Slot or 1×M.2 2280 M Key PCIe Gen4×4 Slot to use ** Please select either 1×PCIe Gen3×4 Slot or 1×M.2 3080 M Key PCIe Gen4×4 Slot to use	
USB	2×USB3.2 Gen2 (Type-A) 2×USB3.2 Gen1 (Pin Header) 2×USB2.0 (Type-A)	
MIPI	16×MIPI CSI-2 Lanes (D-PHY 2.1, 4×4 3×4+2×2 2×4+4×2 1×4+5×2 6×2 MIPI Lanes, Support MIPI Camera, Capture Card)	
Audio	1×3.5mm Line In 1×3.5mm Line Out	
Peripheral Communication	40Pin Header 1×UART (Pin Header) 3×GPIO (Pin Header) 2×CAN Bus (Pin Header or Wafer) 2×I2C (Pin Header) 1×SPI (Pin Header) 3×PWM (Pin Header) 4×Fan Connector 1×RS232 Wafer 1×RS485 Wafer	
Misc. Features	Firmware Upgradable AutoPower (Pin Header)	

Key Points

System	
5G	Sub-6 / SA / Non-SA
4G	LTE Cat20 / LTE FDD / LTE TDD
3G	HSPA+

Add-On Cards / SDK / Software

Video Feature				
Capture Card (Optional)	PCIe Model	Interface	Max. Resolution	Capture / Preview
	SC710N4T HDMI2.0	4×HDMI2.0	4096×2160p@60/50fps	4:2:2 10Bit P210 4:2:0 10Bit P010 4:4:4 8Bit YV24 4:4:4 8Bit RGB32 / 24 4:2:2 8Bit YUY2 4:2:0 8Bit YV12, NV12
	SC710N4T 12G-SDI	4×12G-SDI	4096×2160p@60/50fps	
	SC420N16 TVI	16×TVI / AHD	1920×1080p@30/25fps	
	SC420N8 GMSL2	8×GMSL2	1920×1080p@60/45/30fps	
	SC410N4 HDMI	4×HDMI	4096×2160p@30/25fps	
	SC410N4 6G-SDI	4×6G-SDI	4096×2160p@30/25fps	
	M.2 Model	Interface	Max. Resolution	
	SC710N1 M2 HDMI2.0	1×HDMI2.0	4096×2160p@60/50fps	
	SC710N1 M2 12G-SDI	1×12G-SDI	4096×2160p@60/50fps	
SC400N1 M2 HDV	1×DVI-I, 1×YPbPr, 1×VGA	1920×1080p@60/50fps		
Video Encode	NVIDIA Jetson AGX Orin™ 32GB AV1 (UHP) · 1×4K60 3×4K30 6×1080p60 12×1080p30 H.265 (UHP) · 1×4K60 3×4K30 6×1080p60 12×1080p30 H.264 (UHP) · 1×4K60 2×4K30 5×1080p60 11×1080p30		NVIDIA Jetson AGX Orin™ 64GB AV1 (UHP) · 2×4K60 4×4K30 8×1080p60 16×1080p30 H.265 (UHP) · 2×4K60 4×4K30 8×1080p60 16×1080p30 H.264 (UHP) · 1×4K60 3×4K30 7×1080p60 14×1080p30	
	NVIDIA Jetson AGX Orin™ 32GB AV1 (Main Profile) · 1×8K30 2×4K60 4×4K30 7×1080p60 15×1080p30 H.265 (Main, Main10) · 1×8K30 2×4K60 4×4K30 9×1080p60 18×1080p30 H.264 (Baseline, Main, High) · 1×4K60 2×4K30 5×1080p60 11×1080p30 VP9 (Profile 0, Profile 2) · 1×4K60 3×4K30 7×1080p60 15×1080p30		NVIDIA Jetson AGX Orin™ 64GB AV1 (Main Profile) · 1×8K30 3×4K60 6×4K30 9×1080p60 18×1080p30 H.265 (Main, Main10) · 1×8K30 3×4K60 7×4K30 11×1080p60 22×1080p30 H.264 (Baseline, Main, High) · 1×4K60 3×4K30 6×1080p60 13×1080p30 VP9 (Profile 0, Profile 2) · 1×8K30 3×4K60 6×4K30 9×1080p60 18×1080p30	
SDK				
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture			
	Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams (3D) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine			
	Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required			
QDEEP	AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications Face Recognition Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video AI Functions Upon Request			



SC710N4T HDMI2.0



SC710N4T 12G-SDI



SC420N16 TVI / AHD



SC420N8 GMSL2




SC410N4 HDMI



SC410N4 6G-SDI



SC710N1 M2 HDMI2.0



SC710N1 M2 12G-SDI



SC400N4 M2 TVI/AHD



SC400N4 M2 HDMI




SC400N4 M2 SDI



SC400N1 M2 HDV

td.

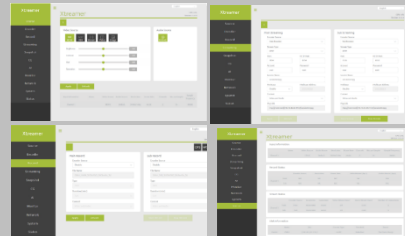
Software (Optional)		
Stream Catcher Pro	Capture	
	Auto Signal Detection	
	Deinterlace, OSD, Color Adjustment Image Snapshot	
	Animation Transform Effect for PGM	
	Record	
AV1, H.26X		
MP4, TS		
Multi-Stream Recording		
Schedule Recording		
Stream		
Multi-Streams Stream Server		
RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*)		
*Separate License Required		
Xtreamer	Web Based User Interface	
	Encode / Decode	
	AV1, H.26X	
	Color Format Adjust	
	444 / 422 / 420, 10Bit / 8Bit Select	
	Record	
	MP4, TS	
Stream / Network		
RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*)		
*Separate License Required		

Environment

Development Environment	
OS	Ubuntu: 20.04
Kernel	5.10.104-tegra or Higher
BSP	Linux for Tegra(L4T) R35.3.1 or Higher
SDK	JetPack 5.1.1 or Higher
Environment	
Power Supply	DC input : 19~24V
Power Consumption	TBA
Operating Temperature	Standard Version: 0~60 ° C with Airflow
Storage Temperature	-20~80 ° C
Certification	CE, FCC


Mechanical

- Dimension of main Case: 181.5mm×167mm
- Weight: TBA

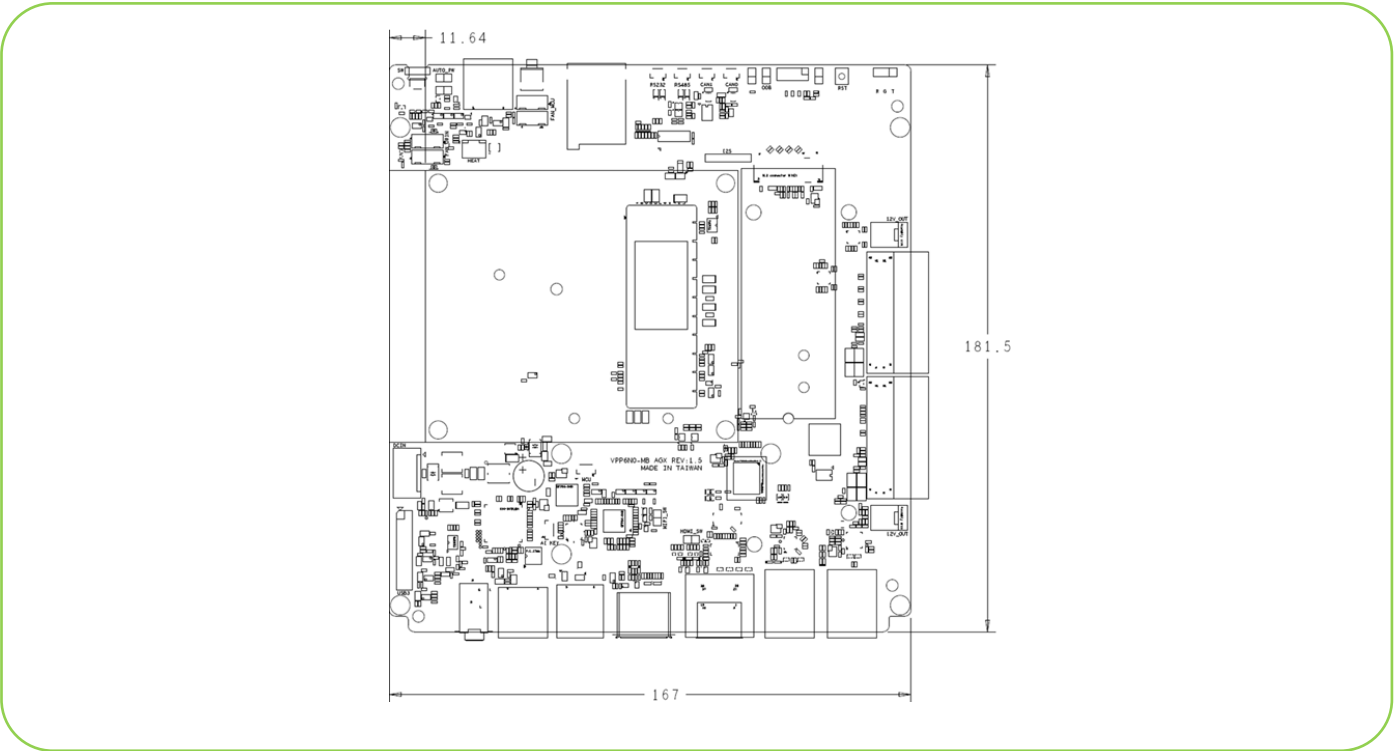

I/O Layout

Carrier Board

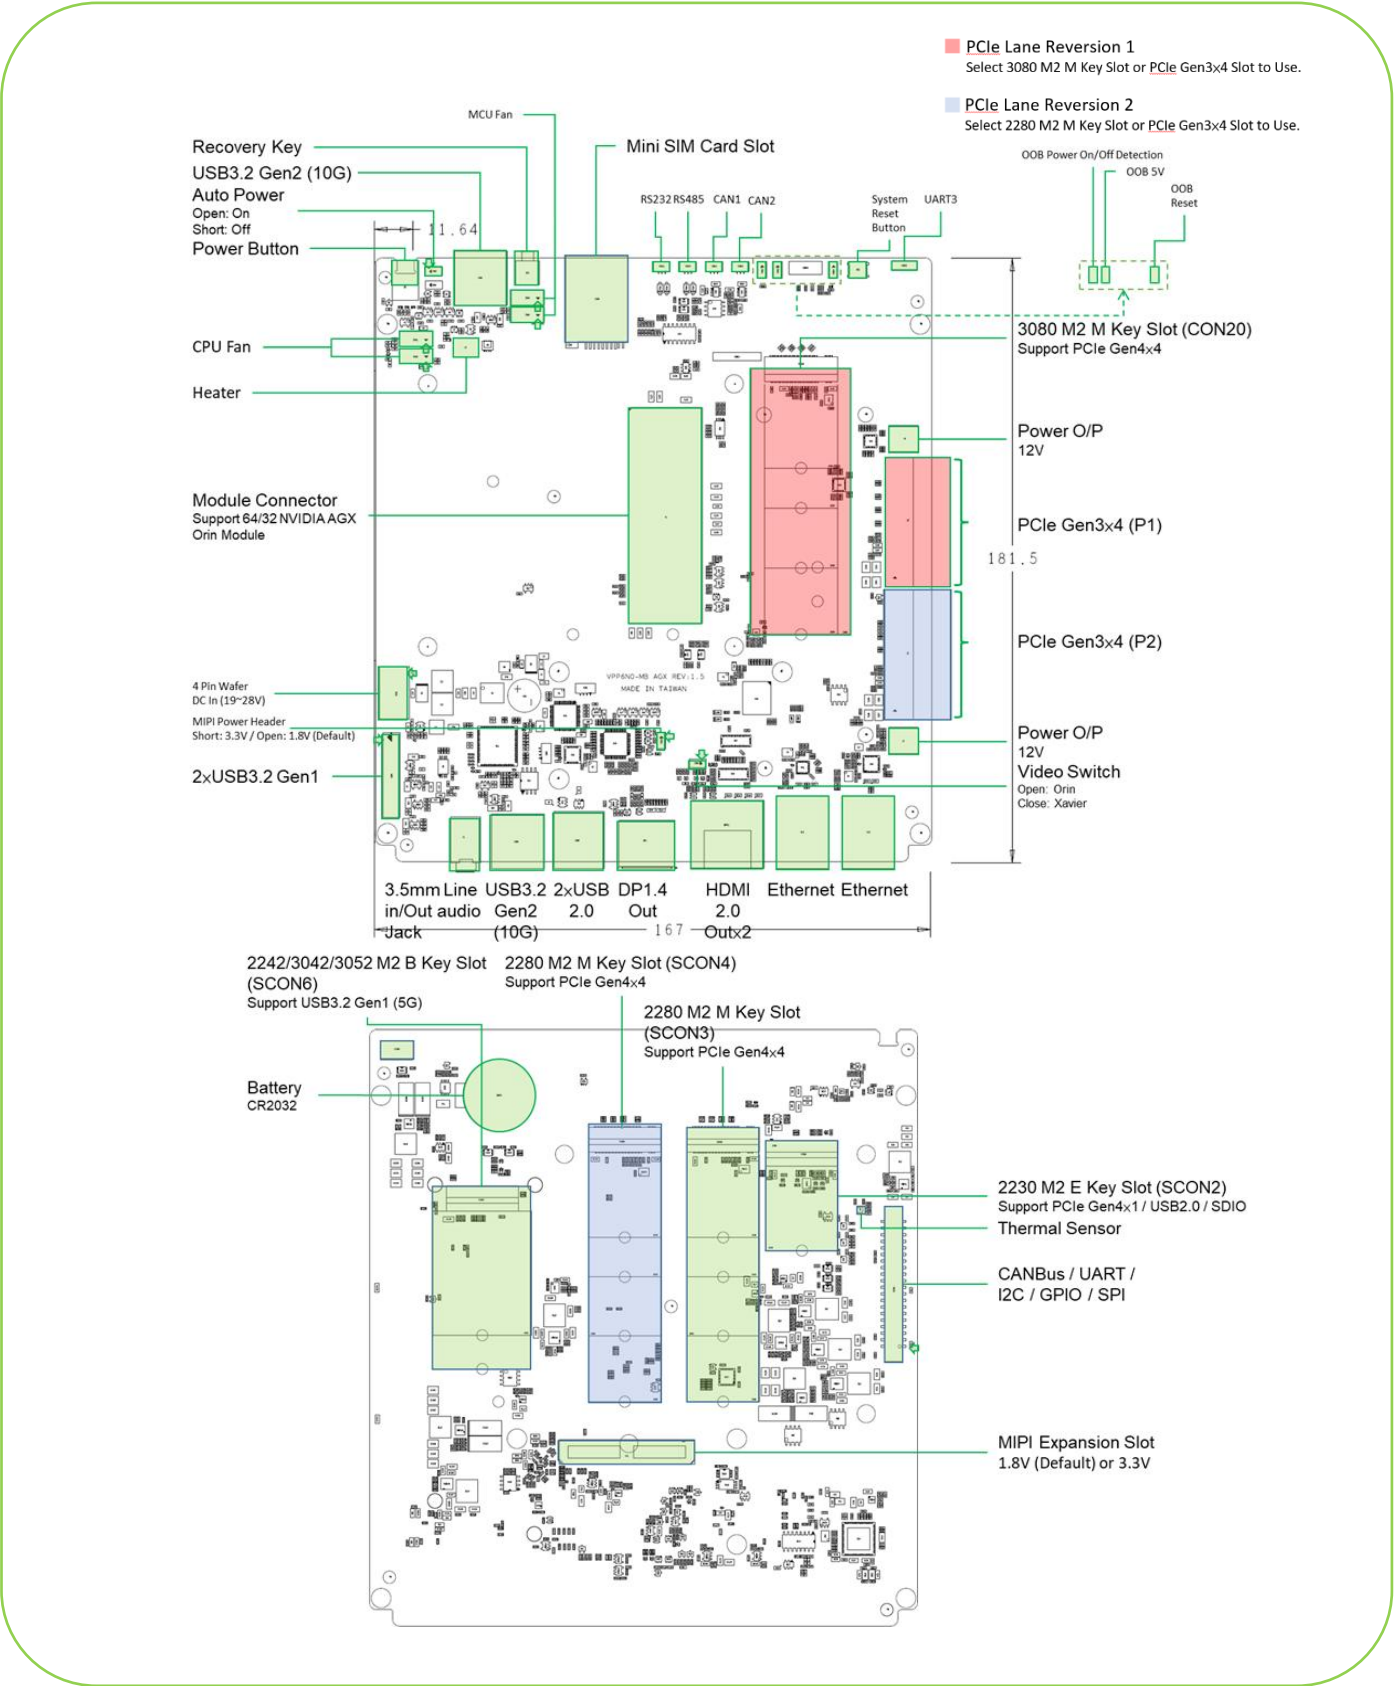

* All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licenses or representatives such as MPEG4, Dolby, Thomson, Sivel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas