NEAR T7X



5581 TFLOPS of AI Computing by NVIDIA Blackwell Architecture

<u>Features</u>

- Powered by NVIDIA IGX Thor™ and NVIDIA® RTX Pro 6000 Blackwell MAXQ Workstation
- NVIDIA IGX Thor™ Motherboard
- Up to 5581 TFLOPS AI Performance
- 2×100Gb QSFP28 Port, 2×1Gb RJ45 Port
- 1×PCle Gen5×8
- 4×USB3.2 Gen2 Type-A, 1×USB3.2 Gen2 Type-C
- Holoscan Sensor Bridge Support





Specifications

System			
CPU	NVIDIA IGX Thor™		
	14-core Arm® Neoverse V3AE		
GPU	NVIDIA IGX Thor™ 2560-Core NVIDIA Blackwell Architecture GPU with 96 5 th Gen Tensor Cores		
	RTX Pro 6000 Blackwell Max-Q Workstation 96 GB GDDR7 Memory, 1792 GB/s Memory Bandwidth 24064-Core NVIDIA Blackwell Architecture GPU		
Al Performance	5581 TFLOPS		
System Memory	Memory: 128GB LPDDR5X		
Interface			
Storage	4×SATA		
Display Interface	4×DP1.4a		
Ethernet	2×100Gb QSFP28 Port 2×RJ45 for 10/100/1000Mbps Ethernet DHCP Client		
	PCle 1×PCle Gen5×16 Slot (With 8 PCle Lanes)		
Expansion Slot	M.2 1×M.2 2230 E Key USB2.0/PCIe Gen2×1 Slot 1×M.2 2280 M Key PCIe Gen5×2 Slot		
USB	4×USB3.2 Gen2 (Type-A) 1×USB3.2 Gen2 (Type-C)		
MIPI	16×MIPI CSI Lanes (Support MIPI Camera, Capture Card)		
Audio	1×3.5mm Line Out 1×3.5mm MIC in		
Perherial Communication	4×COM Port (Pin Header) 1×GPIO (Pin Header) CAN Bus (Pin Header)		
Misc. Features	Firmware Upgradable		

Key Points

GPU Support		
NVIDIA RTX Pro 6000	V	
Blackwell MAXQ		
Workstation		

Add-On Cards / SDK / Software

Video Feature					
Capture Card (Optional)	PCIe Model	Interface	Max. Resolution	Capture / Preview	
	SC750N1-L HDMI2.1	1×HDMI2.1	7680×4320p@60/50fps	4:2:2 10Bit P210 4:2:0 10Bit P010	
	SC720N1-L DP1.4	1×DP1.4	7680×4320p@30/25fps		
	SC720N4 HDMI2.0	4×HDMI2.0	4096×2160p@60/50fps	4:4:4 8Bit YV24	
	SC720N4 12G-SDI	4×12G-SDI	4096×2160p@60/50fps	4:4:4 8Bit RGB32 / 24	
	SC710N2-L HDMI2.0	2×HDMI2.0	4096×2160p@60/50fps	4:2:2 8Bit YUY2	
	SC710N2 12G-SDI	2×12G-SDI, 8×3G-SDI	4096×2160p@60/50fps	4:2:0 8Bit YV12, NV12	
SDK					
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams (3D) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required				
QDEEP	Al SDK Integrated Multiple Alg Access Control Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video Al Functi		lels in Various Fields of Applications		













 SC720N1-L DP1.4a
 SC720N4 HDMI2.0
 SC720N4 12G-SDI
 SC710N2-L HDMI2.0


Software (Optional)		
Stream Catcher Pro	Capture Auto Signal Detection Deinterlace, OSD, Color Adjustment Image Snapshot Animation Transform Effect for PGM	
	Record AV1, H.26X MP4, TS Multi-Stream Recording Schedule Recording	
	Stream Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	
Xtreamer	Web Based User Interface	
	Encode / Decode AV1, H.26X	
	Color Format Adjust 444 / 422 / 420, 10Bit / 8Bit Select	
	Record MP4, TS	The state of the s
	Stream / Network RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	Manual M

Environment


Development Environment		
IGX-SW	1.0 or Higher	
Environment		
Power Supply	100-240V	
Power Consumption	TBA	
Operating Temperature	Standard Version: 5~45 °C with Airflow	
Storage Temperature	-20~85 ° C	


Mechanical

- Dimension of case: 288mm×380mm×160mm
- Dimension of main Board: 238.84mm×198.98mm
- Weight: TBA

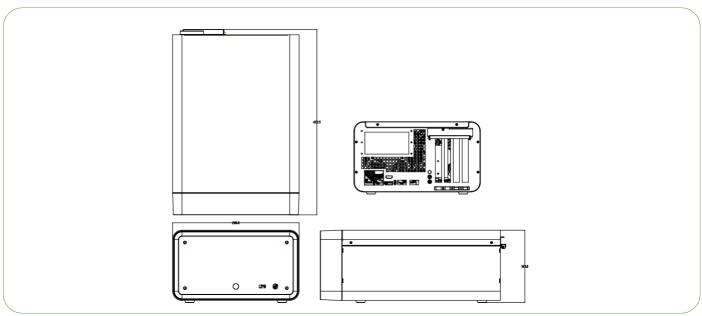

Case

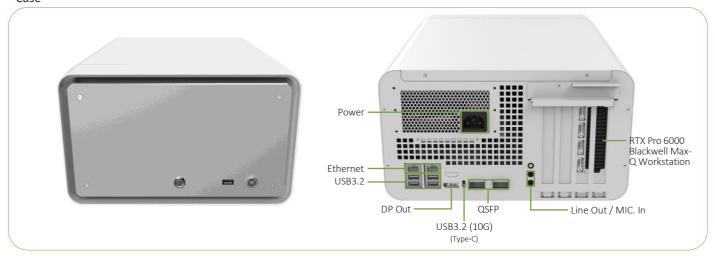



^{*} All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.



Licensees or representatives such as MPEGLA, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.