AIR6NO-C-MB NX HDMI2.1



Al Edge for 8K60

Features

- Powered by NVIDIA® Jetson Orin™ NX up to 100 / 70 TOPS
- Business Card Size (90mm×55mm)
- 1×HDMI2.1 In&Loop
- 1×USB3.2 Gen2
- 1×Mini DisplayPort





Specifications

System			
	NVIDIA Jetson Orin™ NX 8GB	NVIDIA Jetson Orin™ NX 16GB	
CPU	6-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU	8-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU	
GPU	1.5MB L2 + 4MB L3	2MB L2 + 4MB L3	
GPU	1024-Core NVIDIA Ampere Architecture GPU with 32 Tensor Core NVIDIA Jetson Orin™ NX 8GB	NVIDIA Jetson Orin™ NX 16GB	
Al Performance	70 TOPS	100 TOPS	
System Memory	NVIDIA Jetson Orin™ NX 8GB 8GB LPDDR5	NVIDIA Jetson Orin™ NX 16GB 16GB LPDDR5	
Interface			
Storage	Supports External NVMe 1×Micro SD Card Slot		
Display Interface	1×Mini DP1.4		
Ethernet	1×RJ45 for 10/100/1000Mbps Ethernet DHCP Client		
	M.2		
Expansion Slot	1×M.2 2230 M Key PCle Gen4×2 Slot 1×M.2 2230 E Key PCle Gen4×1 Slot		
USB	1×USB3.2 Gen2 (Type-C)		
	Default:		
MIPI	2×4MIPI CSI-2 Lanes (D-PHY 2.1, Support MIPI Camera, Capture Card)		
Will I	Option: 4×2MIPI CSI-2 Lanes (D-PHY 2.1, Support MIPI Camera, Capture Card)		
	14 Pin Header		
	1×USB2.0 4×GPIO		
	1×UART		
	1×I2C		
	3 Pin Header		
	1×UART		
Peripheral Communication	2×6 Pin Header		
	3×GPIO 1×RS485		
	1×12C		
	8 Pin Phoenix Connector		
	3×GPIO		
	1×RS232 1×I2C		
Misc. Features	Firmware Upgradable		

Key Points

Video Feature	
Video Input	1×HDMI2.1
Video Output	1×HDMI2.1 (Loop)


Video Feature		
	AV1 (UHP)	
Video Encode	1×4K60 3×4K30 6×1080p60 12×1080p30	
	H.265 (UHP)	
	1×4K60 3×4K30 6×1080p60 12×1080p30	
	H.264 (UHP)	
	1×4K60 2×4K30 5×1080p60 11×1080p30 AV1 (Main Profile)	
	1×8K30 2×4K60 4×4K30 9×1080p60 20×1080p30	
	H.265 (Main, Main10)	
Video Decode	1×8K30 2×4K60 4×4K30 9×1080p60 18×1080p30	
Video Decode	H.264 (Baseline, Main, High) 1×4K60 2×4K30 5×1080p60 11×1080p30	
	VP9 (Profile 0, Profile 2)	
	1×4K60 3×4K30 7×1080p60 15×1080p30	
SDK		
	Capture	
	High Performance Renderer	
	Image Snapshot Deinterlace, Alpha Blending Engine	
	Auto Signal Detection	
	2D/3D Video, Audio and VANC Streams Capture	
	Record	
	Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording	
QCAP	Multi-Streams (3D) Recording	
	Animation Transition Effect	
	Video Cropping, Scaling and Alpha Blending Engine	
	Stream 2D/3D Universal Stream Client	
	2D/3D Multi-Streams Stream Server	
	RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*)	
	Animation Transition Effect	
	Video Cropping, Scaling and Alpha Blending Engine *Separate License Required	
QDEEP	Al SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications	
	Face Recognition Objects Detection	
	Objects Segment	
	Optical Character Recognition License Plate Recognition	
	Customizable Video AI Functions Upon Request	
Software (Optional)		
	Web Based User Interface	
	Encode / Decode AV1, H.26X	
	Color Format Adjust	
Xtreamer	444 / 422 / 420, 10Bit / 8Bit Select	
	Record MP4 TS	
	MP4, TS Stream / Network	
	RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*),	
	Dante AV-H (*)	
	*Separate License Required	

Environment

Development Environment		
OS	Ubuntu: 20.04	
Kernel	5.10.104-tegra or Higher	
BSP	Linux for Tegra(L4T) R35.3.1 or Higher	
SDK	JetPack 5.1.1 or Higher	
Environment		
Power Supply	DC input: 9~24V	
Power Consumption	TBA	
Operating Temperature	Standard Version: 0~60 °C with Airflow	
Storage Temperature	-20~80 ° C	


Mechanical

- Dimension of main Board: 90mm×55mm
- Weight: TBA

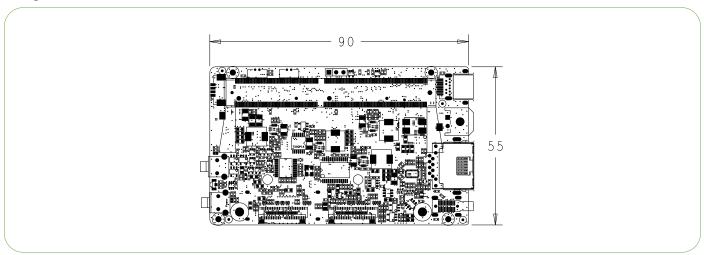



I/O Layout

• Carrier Board

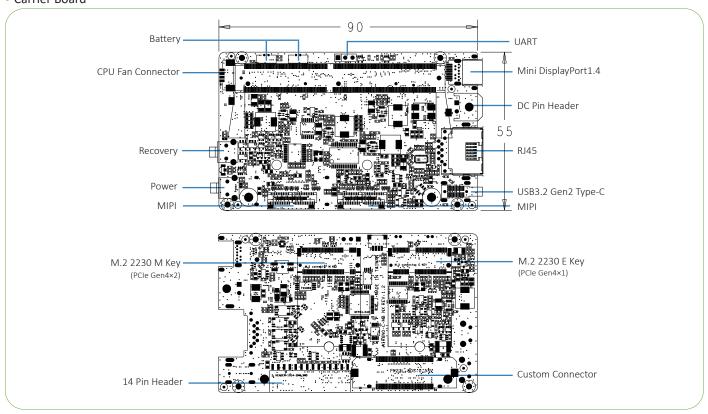

• I/O Board

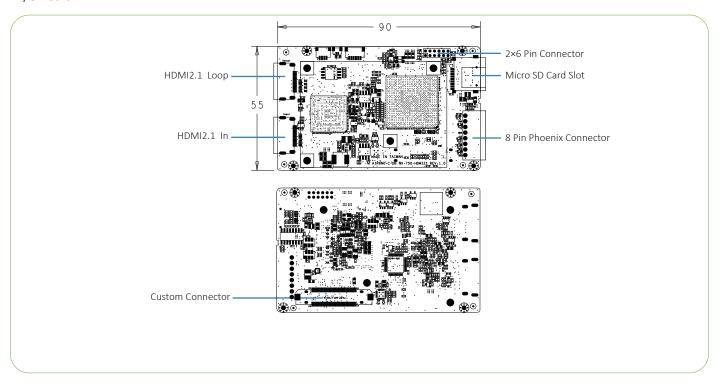



^{*} All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders

