

NEAR T7X

Up to 5581 TFLOPS of AI Computing Powered by NVIDIA IGX Thor™

YUAN
Visualize Intelligent Planet™

Features

- Powered by NVIDIA IGX Thor™ and an optional NVIDIA RTX PRO™ 6000 Blackwell Max-Q Workstation Edition
- NVIDIA IGX Thor™ Motherboard
- Up to 5581 FP4 TFLOPS AI Performance
- 2×100Gb QSFP112 Port, 2×1Gb RJ45 Port
- 1×PCIe Gen5×8
- 4×USB3.2 Gen2 Type-A, 1×USB3.2 Gen2 Type-C
- Holoscan Sensor Bridge Support



Specifications

System	
NVIDIA Module	NVIDIA IGX™ T7000
CPU	14-core Arm® Neoverse V3AE
GPU	NVIDIA IGX Thor™ 2560-Core NVIDIA Blackwell Architecture GPU with 5 th Gen Tensor Cores (optional) NVIDIA RTX PRO 6000 Blackwell Max-Q Workstation Edition 96 GB GDDR7 Memory, 1792 GB/s Memory Bandwidth 24064-Core NVIDIA Blackwell Architecture GPU
AI Performance	5581 TFLOPS (FP4 - Sparse) with an optional NVIDIA RTX PRO 6000 Blackwell Max-Q Workstation Edition
System Memory	Memory: 128GB LPDDR5X
Interface	
Storage	4×SATA
Display Interface	4×DP1.4a
Ethernet	2×100Gb QSFP112 Port 2×RJ45 for 10/100/1000Mbps Ethernet DHCP Client
Expansion Slot	PCIe 1×PCIe Gen5×16 Slot (With 8 PCIe Lanes) M.2 1×M.2 2230 E Key USB2.0/PCIe Gen2×1 Slot 1×M.2 2280 M Key PCIe Gen5×2 Slot
USB	4×USB3.2 Gen2 (Type-A) 1×USB3.2 Gen2 (Type-C)
MIPI	16×MIPI CSI Lanes (Support MIPI Camera, Capture Card)
Audio	1×3.5mm Line Out 1×3.5mm MIC in
Perherial Communication	4×COM Port (Pin Header) 1×GPIO (Pin Header) CAN Bus (Pin Header)
Misc. Features	Firmware Upgradable

Key Points

GPU Support	
NVIDIA RTX PRO 6000 Blackwell Max-Q Workstation Edition	V

Add-On Cards / SDK / Software

Video Feature				
	PCIe Model	Interface	Max. Resolution	Capture / Preview
Capture Card (Optional)	SC750N1-L HDMI2.1	1×HDMI2.1	7680×4320p@60/50fps	4:2:2 10Bit P210
	SC720N1-L DP1.4	1×DP1.4	7680×4320p@30/25fps	4:2:0 10Bit P010
	SC720N4 HDMI2.0	4×HDMI2.0	4096×2160p@60/50fps	4:4:4 8Bit YV24
	SC720N4 12G-SDI	4×12G-SDI	4096×2160p@60/50fps	4:4:4 8Bit RGB32 / 24
	SC710N2-L HDMI2.0	2×HDMI2.0	4096×2160p@60/50fps	4:2:2 8Bit YUY2
	SC710N2 12G-SDI	2×12G-SDI, 8×3G-SDI	4096×2160p@60/50fps	4:2:0 8Bit YV12, NV12
SDK				
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture			
	Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams (3D) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine			
	Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required			
QDEEP	AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications Access Control Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video AI Functions Upon Request			



SC750N1-L HDMI2.1



SC720N1-L DP1.4a



SC720N4 HDMI2.0




SC720N4 12G-SDI



SC710N2-L HDMI2.0



SC710N2 12G-SDI

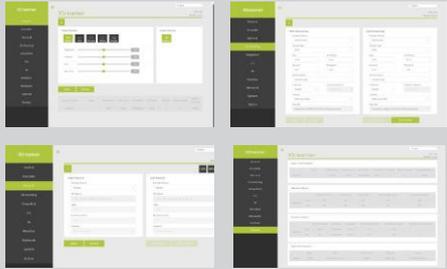
Software (Optional)		
Stream Catcher Pro	Capture Auto Signal Detection Deinterlace, OSD, Color Adjustment Image Snapshot Animation Transform Effect for PGM	
	Record AV1, H.26X MP4, TS Multi-Stream Recording Schedule Recording	
	Stream Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	
Xtreamer	Web Based User Interface	
	Encode / Decode AV1, H.26X	
	Color Format Adjust 444 / 422 / 420, 10Bit / 8Bit Select	
	Record MP4, TS	
	Stream / Network RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	

Environment

Development Environment	
IGX-SW	2.0 or Higher
Environment	
Power Supply	100-240V
Power Consumption	TBA
Operating Temperature	Standard Version: 5~45 °C with Airflow
Storage Temperature	-20~85 °C


Mechanical

- Dimension of case: 288mm×380mm×160mm
- Dimension of main Board: 238.84mm×198.98mm
- Weight: TBA

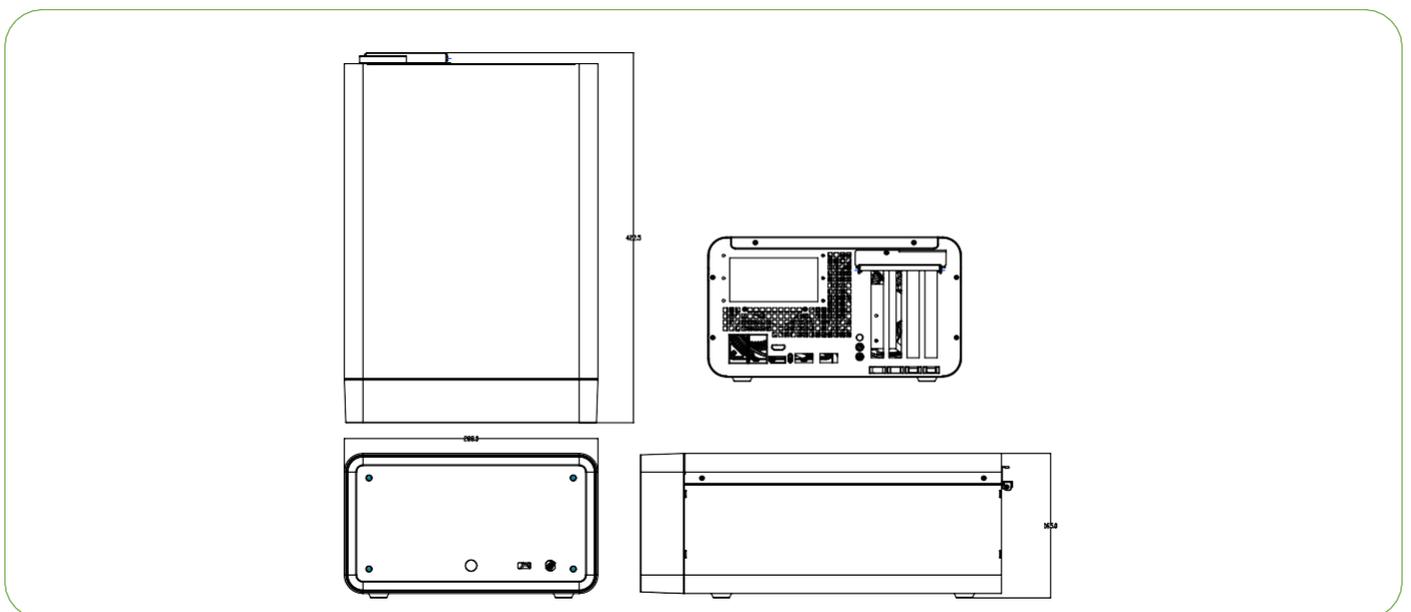

I/O Layout

- Case

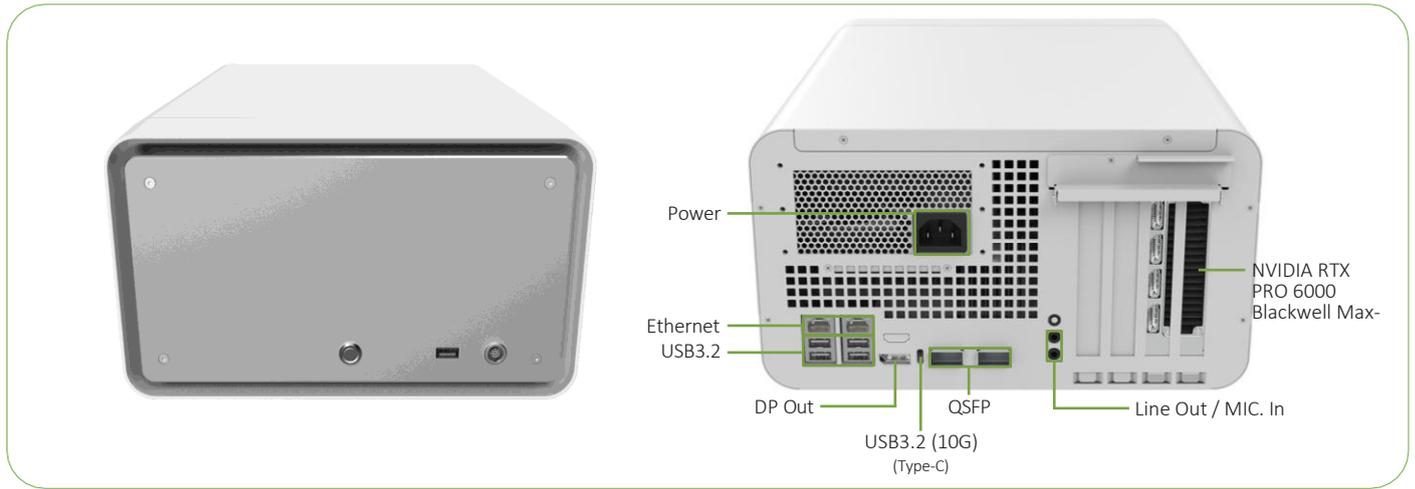

* All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licensees or representatives such as MPEGLA, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.

